

QV-IPC717664T9AB-TMUR16

6MP Fixed Turret Network Camera





Based on Qualvision's advanced technologies, Seco Series provides intelligent, simple and inclusive products and solutions. The system focuses on human targets, vastly improving alarm efficiency and effectiveness.



Key Features

- High quality imaging with 6MP resolution
- Efficient H.265+ compression technology
- Focus on human targets classification
- Water and dust resistant (IP67)
- Built-in microphone for real-time audio security

Dimensions

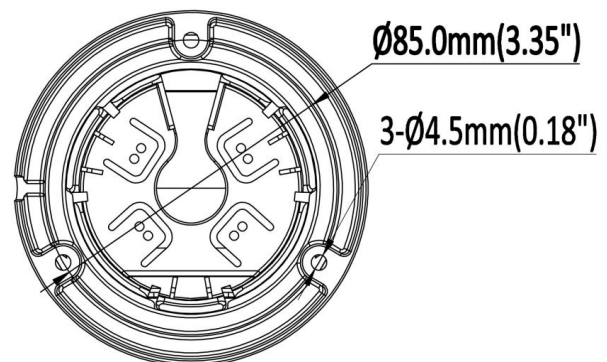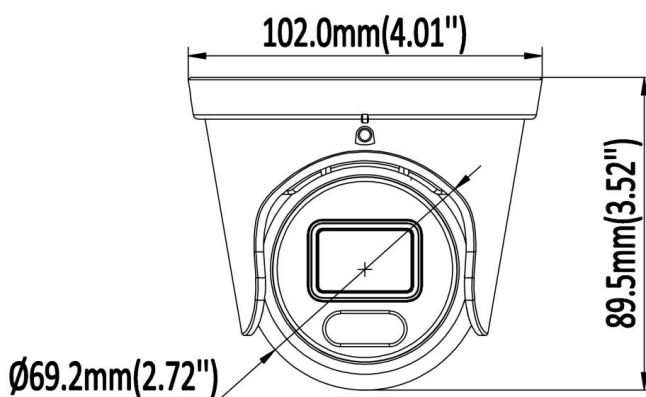



Specification

Camera	
Image Sensor	1/2.7" Progressive Scan CMOS Sensor
Min. Illumination	Color: 0.006 Lux (F1.6 , AGC ON) , 0 Lux with light
Illumination Distance	30 m (IR light) 30 m (warm light)
Strobe Light	N/A
Smart IR	Support
Pan/Tilt/Rotation Range	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotation: 0° ~ 360°
Lens	
Focal Length	2.8/3.6 mm
Aperture	F1.6
FOV	2.8 mm @ F1.6 Horizontal FOV: 110°, Vertical FOV: 59°, Diagonal FOV: 132° 3.6 mm @ F1.6 Horizontal FOV: 96°, Vertical FOV: 48°, Diagonal FOV: 114°
Lens Mount	M12
DORI	
DORI	2.8 mm, D: 73.8m, O: 29.6m, R: 15.7m, I: 7.4m 3.6 mm, D: 94m, O: 37.6m, R: 18.8m, I: 9.4m
Compression Standard	
Video Compression	H.264/H.264+/H.265/H.265+/MJPEG
H.264 Codec Profile	Base/Main/High profile
H.265 Codec Profile	Main Profile
Video Bit Rate	11 Kbps ~ 13Mbps
Triple Streams	Support
Audio Compression	G.711A, G.711U
Audio Bit Rate	64 Kbps
Image	
Max. Image Resolution	6M (3296 x 1856)
Main Stream	50Hz: 20fps 6M (3296 x 1856), 25fps 5M (3072 x 1728) 25fps 4M (2560 x 1440), 25fps 2M (1920 x 1080) 60Hz: 20fps 6M (3296 x 1856), 30fps 5M (3072 x 1728) 30fps 4M (2560 x 1440), 30fps 2M (1920 x 1080)
Sub Stream	50Hz:25fps 720P(1280 × 720) 25fps D1(704 × 576),25fps CIF(352 × 288) 60Hz:30fps 720P(1280 × 720) 30fps D1(704 × 480),30fps CIF(352 × 240)



Third Stream	50Hz:25fps CIF(352 × 288) 60Hz:30fps CIF(352 × 240)
Image Setting	Brightness/Contrast/Saturation/Hue/Sharpness
Shutter Time	Auto/Manual, 1/3~1/100000s
Day/Night	IR Cut Filter
Wide Dynamic Range	DWDR
Digital Noise Reduction	2D/3D DNR
BLC	Support
HLC	Support
ROI	Support
Rotate	Support
Smart Feature	
Basic Event	Motion detection , video tampering
Smart Event	Smart motion detection (support alarm triggering by specified target types (human and vehicle)) Line crossing, intrusion, region entrance, region exiting (support alarm triggering by specified target types (human ,vehicle))
Face Detection	N/A
Network	
Network Storage	NAS (NFS, SMB/CIFS)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, Cloud
System Compatibility	Onvif (Profile S, Profile G, T) , SDK
Security	HTTPS encryption, IP address filter, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface
User	Up to 40 users
Web Browsers	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Mobile Surveillance	IOS, Android
Active Deterrence	
Red/Blue Light Warning	N/A
Sound Warning	N/A
Interface	
Communication interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-board storage	Up to 256GB
MIC	Support
Speaker	N/A
Audio I/O	N/A



Alarm I/O	N/A
Reset button	Support
General	
Operating Conditions	-40°C ~ 60°C (-40°F ~ 140°F) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%
POE	PoE (802.3 af)
Power Consumption	MAX. 6.1 W
Protection Level	IP67
Material	Metal
Dimensions	Φ 102× 89.5 mm (Φ4.01 " × 3.52")
Gross Weight	460g (1.01lb)

Related Accessories

LB10	LB02	LB14C	PM03	CM700
Junction Box, Φ 112.5 × 49.5 MM	Junction Box, non- waterproof, Φ103.3 × 37.8MM	Wall Mount, Φ 120 × 105.8 × 183.5 MM	Pole Mount, Φ170 × 135.8 × 43.7 MM	Pendant Mount, Φ 116 × 734.5 MM
				
LB01B				
Junction Box, 145.2 × 145.2 × 53.5 MM				
				

Please select accessories according to the installation scenario:

